

# MB-18

## 18" Dual-Flex Gooseneck Intended for 1600VP Microphone System

### Description

The MB-18 is an 18" dual-flex gooseneck intended to support the Astatic 1600VP microphone system. The MB-18 is designed to fit on a quick-mount type XLR-type connector mounted in a table or shock mount. The dual-flex gooseneck features a diameter of 8mm on the bottom and 6mm on the top for exact positioning and low visibility.

The MB-18 is terminated with a TA3F-type connector which mates with the microphone head of the Astatic 1600VP microphone system. The opposite end of the gooseneck is fitted with a XLRM-type connector to be used for mounting the gooseneck to a base, shock mount or chassis type connector.

RF Resistant Architecture provides greatly reduced susceptibility to radio interference from GSM based cell phones/smart phones, two-way walkie-talkies and similar communication devices.




### Features

- Silent, durable 18" (45.7cm) dual-flex gooseneck
- RF (radio frequency) Resistant Architecture
- Quick-mount format

Shown with 1600VP  
Microphone System



### Dimensional Drawing

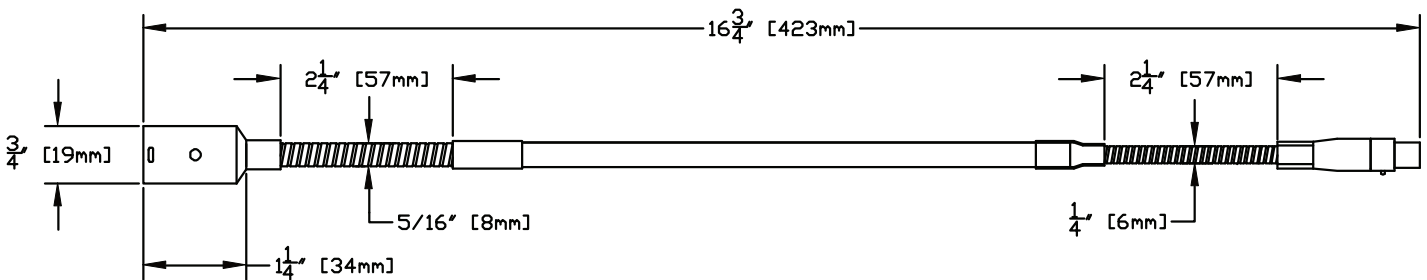

ASTATIC COMMERCIAL

# MB-18

## 18" Dual-Flex Gooseneck Intended for 1600VP Microphone System


### Specifications†

**Material** ..... Brass and carbon fiber  
**Connectors** ..... TA3F-type to XLRM-type  
**Weight** ..... 3.8oz [.11kg]  
**Finish** ..... Black-matte urethane and powder coat  
**Certifications** ..... CE and RoHS

† Specifications subject to change without notice.

**Optional Accessories** ..... GSM-1 Shock mount,  
FM-1A Flange mount,  
FM-2A Flange mount,  
40 series bases.

### Wiring Diagram

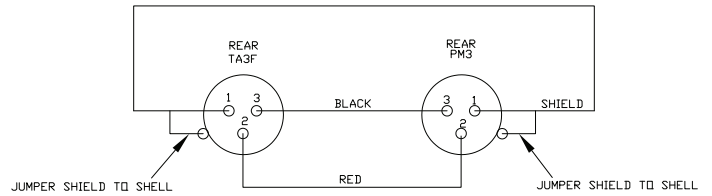

#### Two-Year Limited Warranty

CAD Audio hereby warrants that this product will be free of defects in material and workmanship for a period of two years from the date of purchase. In the unlikely event that a defect occurs CAD Audio will, at its option, either repair or replace with a new unit of equal or greater value. Retain proof of purchase to validate the purchase date and return it with any warranty claim.

This warranty excludes exterior finish or appearance, damage from abuse, misuse of the product, use contrary to CAD Audio's instructions or unauthorized repair. All implied warranties, merchantability, or fitness for a particular purpose is hereby disclaimed and CAD Audio hereby disclaims liability for incidental, special or consequential damages resulting from the use or unavailability of this product.

This warranty gives you specific legal rights and you may have other rights that vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages or limitations on how long an implied warranty lasts, so the above exclusions and limitations may not apply to you.

Note: No other warranty, written or oral is authorized by CAD Audio.

#### Shipping Instructions

Please call our customer service department at 440-349-4900 for a pre-approved return authorization number.

Carefully repack the unit and return the insured package to: CAD Audio, 6573 Cochran Road, Building I, Solon, Ohio 44139.

**RETURNS WITHOUT A PRE-APPROVED RETURN AUTHORIZATION NUMBER WILL BE REFUSED.**

If outside the United States, contact your local dealer or distributor for warranty details.



©2010 CAD Audio  
Part No. 46873-94-00 Jan2010



**CAD Audio**  
6573 Cochran Rd. Building I  
Solon, Ohio 44139 U.S.A.  
Tel: (440) 349-4900 Fax: (440) 248-4902  
Sales: (800) 762-9266  
www.cadaudio.com